




SFBS Series

200W / Full Brick

DC/DC

Applications

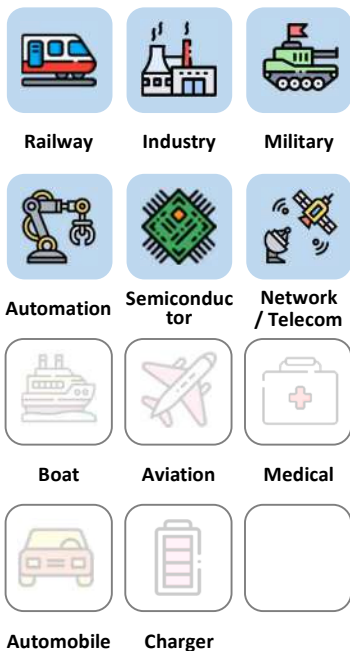

3 Years Warranty



Features

Full Brick	2:1 / 4:1 Wide input range	Vicor Pin out	PI FILTER Built-in	2250 VDC Insulation	MLCC No life-span constrained	89% High efficiency	ON / OFF REMOTE
METAL CASE	UVLO	OCP	OVP	OTP			

Model Number Structure

SFBS 110 120 - V - P - B 200

Series Name	Input Voltage (VDC)	Output Voltage (VDC)	Pin out	Remote Control Option	Shape	Watt
Supreme series	024W : 9-36	050 : 5				
Full	024 : 18-36	120 : 12				50
Brick	048W : 18-75	240 : 24	V : Vicor	P : Positive logic N : Negative logic	B : Base Plate	100
Second	110 : 40-160	280 : 28				200
	300 : 180-425	480 : 48				

Model Selection Guide

Typical @ Ta=+25 °C under nominal line voltage conditions unless noted


Model	Input			Output			Efficiency
	Voltage (V)		Current (A)	Voltage	Current	Power	
	Range	Nominal	Full load	(V)	(A)	(W)	Typ.(%)
SFBS024W050-V-□-B50	9-36	24	2.37	5	10	50	88
SFBS024W120-V-□-B50	9-36	24	2.34	12	4.17	50	89
SFBS024W240-V-□-B50	9-36	24	2.34	24	2.08	50	89
SFBS024W280-V-□-B50	9-36	24	2.34	28	1.79	50	89
SFBS024W480-V-□-B50	9-36	24	2.34	48	1.04	50	89
SFBS024W050-V-□-B100	9-36	24	4.73	5	20	100	88
SFBS024W120-V-□-B100	9-36	24	4.68	12	8.33	100	89
SFBS024W240-V-□-B100	9-36	24	4.68	24	4.17	100	89
SFBS024W280-V-□-B100	9-36	24	4.68	28	3.57	100	89
SFBS024W480-V-□-B100	9-36	24	4.68	48	2.08	100	89
SFBS024W050-V-□-B200	9-36	24	9.47	5	40	200	88
SFBS024W120-V-□-B200	9-36	24	9.47	12	16.67	200	88
SFBS024W240-V-□-B200	9-36	24	9.47	24	8.33	200	88
SFBS024W280-V-□-B200	9-36	24	9.47	28	7.14	200	88
SFBS024W480-V-□-B200	9-36	24	9.47	48	4.16	200	88
SFBS024050-V-□-B50	18-36	24	2.37	5	10	50	88
SFBS024120-V-□-B50	18-36	24	2.34	12	4.17	50	89
SFBS024240-V-□-B50	18-36	24	2.34	24	2.08	50	89
SFBS024280-V-□-B50	18-36	24	2.34	28	1.79	50	89
SFBS024480-V-□-B50	18-36	24	2.34	48	1.04	50	89
SFBS024050-V-□-B100	18-36	24	4.73	5	20	100	88
SFBS024120-V-□-B100	18-36	24	4.68	12	8.33	100	89
SFBS024240-V-□-B100	18-36	24	4.68	24	4.17	100	89
SFBS024280-V-□-B100	18-36	24	4.68	28	3.57	100	89
SFBS024480-V-□-B100	18-36	24	4.68	48	2.08	100	89
SFBS024050-V-□-B200	18-36	24	9.26	5	40	200	90
SFBS024120-V-□-B200	18-36	24	9.26	12	16.67	200	90
SFBS024240-V-□-B200	18-36	24	9.26	24	8.33	200	90
SFBS024280-V-□-B200	18-36	24	9.26	28	7.14	200	90
SFBS024480-V-□-B200	18-36	24	9.26	48	4.16	200	90

Model	Input			Output			Efficiency
	Voltage (V)		Current (A)	Voltage	Current	Power	
	Range	Nominal	Full load	(V)	(A)	(W)	Typ.(%)
SFBS048W050-V-□-B50	18-75	48	1.18	5	10	50	88
SFBS048W120-V-□-B50	18-75	48	1.17	12	4.17	50	89
SFBS048W240-V-□-B50	18-75	48	1.17	24	2.08	50	89
SFBS048W280-V-□-B50	18-75	48	1.17	28	1.79	50	89
SFBS048W480-V-□-B50	18-75	48	1.17	48	1.04	50	89
SFBS048W050-V-□-B100	18-75	48	2.37	5	20	100	88
SFBS048W120-V-□-B100	18-75	48	2.34	12	8.33	100	89
SFBS048W240-V-□-B100	18-75	48	2.34	24	4.17	100	89
SFBS048W280-V-□-B100	18-75	48	2.34	28	3.57	100	89
SFBS048W480-V-□-B100	18-75	48	2.34	48	2.08	100	89
SFBS048W050-V-□-B200	18-75	48	4.73	5	40	200	88
SFBS048W120-V-□-B200	18-75	48	4.73	12	16.67	200	88
SFBS048W240-V-□-B200	18-75	48	4.73	24	8.33	200	88
SFBS048W280-V-□-B200	18-75	48	4.73	28	7.14	200	88
SFBS048W480-V-□-B200	18-75	48	4.73	48	4.16	200	88
SFBS110050-V-□-B50	40-160	110	0.52	5	10	50	88
SFBS110120-V-□-B50	40-160	110	0.51	12	4.17	50	89
SFBS110240-V-□-B50	40-160	110	0.51	24	2.08	50	89
SFBS110280-V-□-B50	40-160	110	0.51	28	1.79	50	89
SFBS110480-V-□-B50	40-160	110	0.51	48	1.04	50	89
SFBS110050-V-□-B100	40-160	110	1.03	5	20	100	88
SFBS110120-V-□-B100	40-160	110	1.02	12	8.33	100	89
SFBS110240-V-□-B100	40-160	110	1.02	24	4.17	100	89
SFBS110280-V-□-B100	40-160	110	1.02	28	3.57	100	89
SFBS110480-V-□-B100	40-160	110	1.02	48	2.08	100	89
SFBS110050-V-□-B200	40-160	110	2.07	5	40	200	88
SFBS110120-V-□-B200	40-160	110	2.07	12	16.67	200	88
SFBS110240-V-□-B200	40-160	110	2.07	24	8.33	200	88
SFBS110280-V-□-B200	40-160	110	2.07	28	7.14	200	88
SFBS110480-V-□-B200	40-160	110	2.07	48	4.16	200	88

Model	Input			Output			Efficiency
	Voltage (V)		Current (A)	Voltage	Current	Power	
	Range	Nominal	Full load	(V)	(A)	(W)	Typ.(%)
SFBS300050-V-□-B50	180-425	300	0.19	5	10	50	88
SFBS300120-V-□-B50	180-425	300	0.19	12	4.17	50	89
SFBS300240-V-□-B50	180-425	300	0.19	24	2.08	50	89
SFBS300280-V-□-B50	180-425	300	0.19	28	1.79	50	89
SFBS300480-V-□-B50	180-425	300	0.19	48	1.04	50	89
SFBS300050-V-□-B100	180-425	300	0.38	5	20	100	88
SFBS300120-V-□-B100	180-425	300	0.37	12	8.33	100	89
SFBS300240-V-□-B100	180-425	300	0.37	24	4.17	100	89
SFBS300280-V-□-B100	180-425	300	0.37	28	3.57	100	89
SFBS300480-V-□-B100	180-425	300	0.37	48	2.08	100	89
SFBS300050-V-□-B200	180-425	300	0.76	5	40	200	88
SFBS300120-V-□-B200	180-425	300	0.76	12	16.67	200	88
SFBS300240-V-□-B200	180-425	300	0.76	24	8.33	200	88
SFBS300280-V-□-B200	180-425	300	0.76	28	7.14	200	88
SFBS300480-V-□-B200	180-425	300	0.76	48	4.16	200	88

Description

Supreme series - Full Brick - Second generation converter is composed of Isolated, board-mountable, fixed switching frequency DC-DC converters that use synchronous rectification to achieve extremely high-power conversion efficiency. These DC-DC converter modules use advanced power processing, control and packaging technologies to enhance the performance, flexibility, reliability and cost effectiveness of mature power components. Each module is six-sided metal case enclosed to provide protection from the harsh environments seen in many industrial and transportation applications.

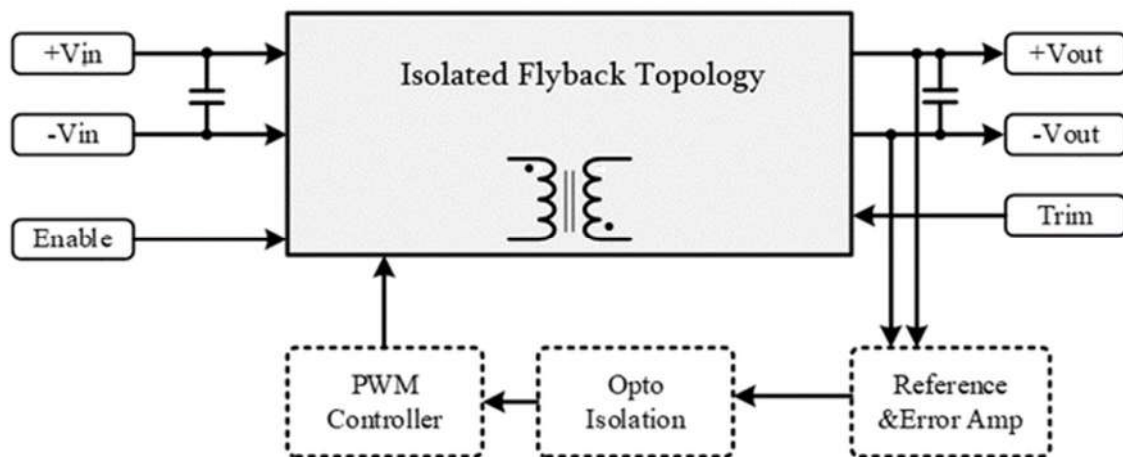

SFBS Series Block Diagram

Electrical Specifications

Input Specifications (Typical @ Ta=+25 °C under nominal line voltage conditions unless noted.)

Parameter	Notes and Conditions	Min.	Typ.	Max.	Unit
Transient Input Voltage Ranges	SFBS024W models (100ms Max)			50	VDC
	SFBS024 models (100ms Max)			50	
	SFBS048W models (100ms Max)			80	
	SFBS110 models (100ms Max)			250	
	SFBS300 models (100ms Max)			500	
Operating Input Voltage Ranges	SFBS024W models	9	24	36	VDC
	SFBS024 models	18	24	36	
	SFBS048W models	18	48	75	
	SFBS110 models	40	110	160	
	SFBS300 models	180	300	425	
Under-Voltage Lockout Start up Voltage	SFBS024W models			9	VDC
	SFBS024 models			18	
	SFBS048W models			18	
	SFBS110 models			40	
	SFBS300 models			180	
Under-Voltage Lockout Shutdown Voltage	SFBS024W models		8		VDC
	SFBS024 models		17		
	SFBS048W models		17		
	SFBS110 models		38		
	SFBS300 models		170		
Input Current	See model selection guide, Standby mode (OFF, UVLO) 8mA				
Enable Function Input	Positive logic	ON	Open		VDC
		OFF	Short or 0 ~ 1.2		
	Negative logic	ON	Short or 0 ~ 1.2		VDC
		OFF	Open		

Output Specifications

Parameter	Notes and Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	V _{NOM} 50% Load			±1.5	%
Line Regulation	Low Line to High Line			±0.3	%
Load Regulation	10% to 100% Load			±0.5	%
Output Ripple & Noise Voltage	Bandwidth 20MHz and with 10μF MLCC Output Capacitor		1.5		%V _{pk-pk}
Temperature Coefficient				±0.04	% / °C
Transient Recovery Time	25% load step change		800		μSec.
Transient Peak Deviation	ΔIo/Δt=2.5A/μs		±2		%Vo
Start-Up Time	When use Enable Function		20		mSec.
Trimming Output Voltage	V _{NOM} 10% Load		±10		%
Over Voltage Protection	V _{NOM} 10% Load		120		%
Output Power Protection	V _{NOM}		120		%

General Specifications & Environmental Specifications

Parameter	Notes and Conditions	Min.	Typ.	Max.	Unit
Switching Frequency	V _{NOM}	180		300	kHz
Storage Temperature Range	All models	-60		125	°C
Operating Case Temperature	All models	-40		100	°C
Over temperature Protection	All models, Auto. Recovery		105		
Isolation Voltage	All models, 1 Minute	2250			VDC

Input to Output					
Isolation Resistance	All models, 500VDC, At 70%RH	100			MΩ
Input to Output					
Isolation Capacitance	All models		1500		pF
Input to Output					
Humidity (non condensing)	All models			95	%
Calculated MTBF	BellCore-TR-332@ 50°C G.B		1.5		M HR
Thermal shock	Environmental Engineering Experimental Tests	MIL-STD-810F			
Vibration		MIL-STD-810F			
Drop		MIL-STD-810F			
Weight	Shape-B	220(7.76)			g (oz.)
Dimensions	Shape-B	4.62'' x 2.40'' x 0.59'' (117.3 x 61.0 x 15.0mm)			
Case Material	Aluminum				
Potting Material	Silicone				

Standards Compliance

Parameter	Standard	Test Conditions	Performance Criteria
Environmental Compliance	Reach; RoHS		PASS
EMI	EN55022		Class A / Class B
ESD	EN61000-4-2	±4 kV Air Discharge ±4 kV Contact Discharge	Crit. A
Radiated Immunity	EN61000-4-3	Level 2, 3 V/m	Crit. A
Fast Transient	EN61000-4-4	±2 kV Applied	Crit. A
Surge	EN61000-4-5	±2 kV Applied	Crit. A
Conducted Immunity	EN61000-4-6	Level 2, 3 V rms	Crit. A


It is recommended to protect the input by fuses or other protection devices.

Modules could meet EN55022 Class A and Class B standard with external components.

The information and specifications contained in this data sheet are believed to be correct at time of publication. All specifications are subject to change without notice. No rights under any patent accompany the sale of any such products or information contained herein.

Mechanical Dimensions & Pin Assignments

Shape – B

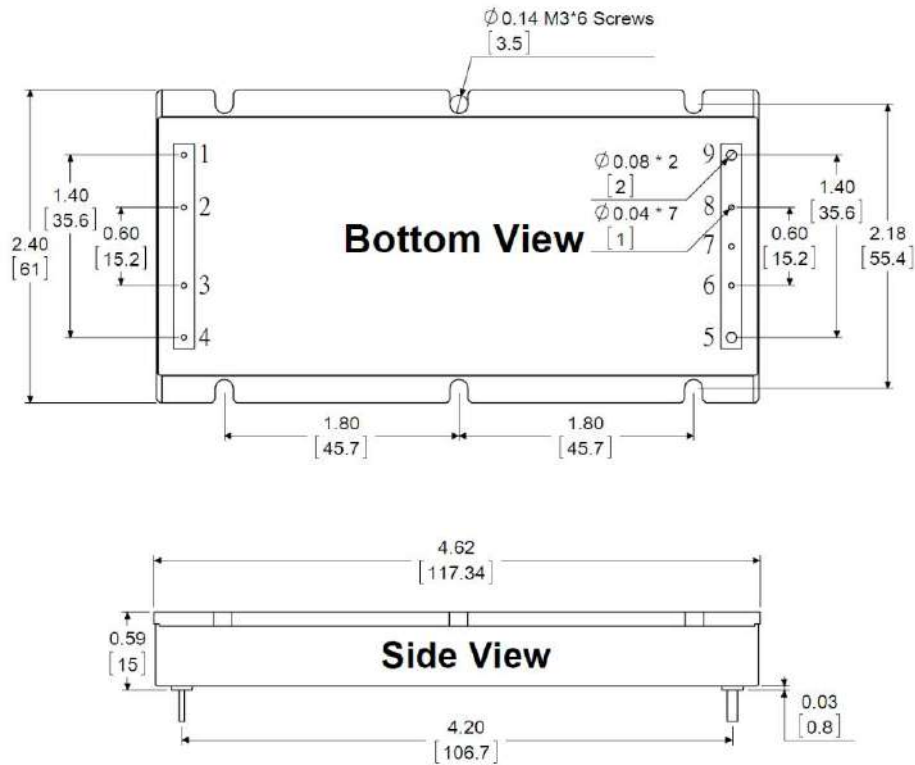

Pin Assignments:

Pin#	Function
1	-Vin
2	--
3	Enable
4	+Vin
5	+Vout
6	+Sense
7	Trim
8	-Sense
9	-Vout

Note:

Pin Material: Copper Alloy

Pin Plating: Gold

Dimensions in inches [mm]

Tolerances: .XX±0.02 [.X±0.5mm]

Characteristic Curves

Testing conditions are at typical input, $T_a = +25^\circ\text{C}$, full load (horizontal mount) Unless otherwise indicated

The figures of SFBS024W240-V-P-B200

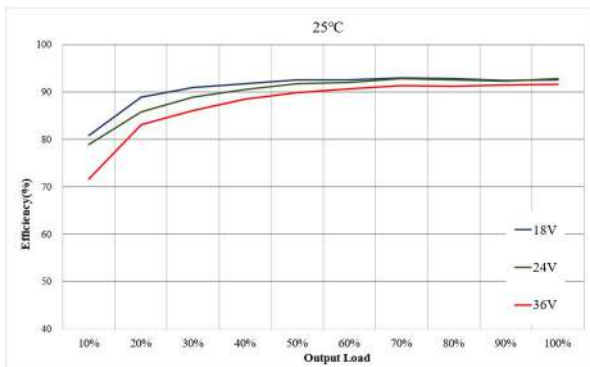


Figure 1 : Efficiency at Minimum, Nominal and Maximum Input Voltages VS. Output Load.

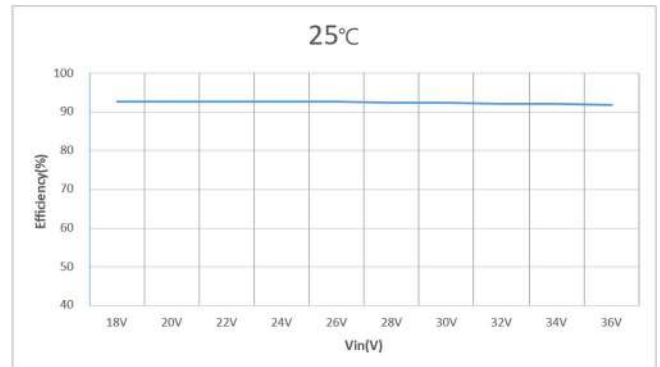


Figure 2 : Efficiency VS. Input Voltages at 100% rated power

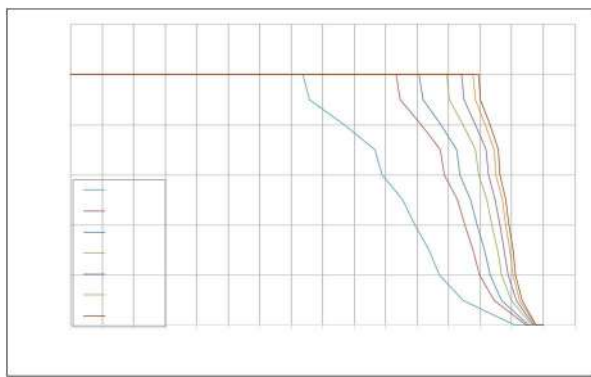


Figure 3 : Ambient Temperature VS. Output Power Derating Curves (Note: 20LFM = Free Air)

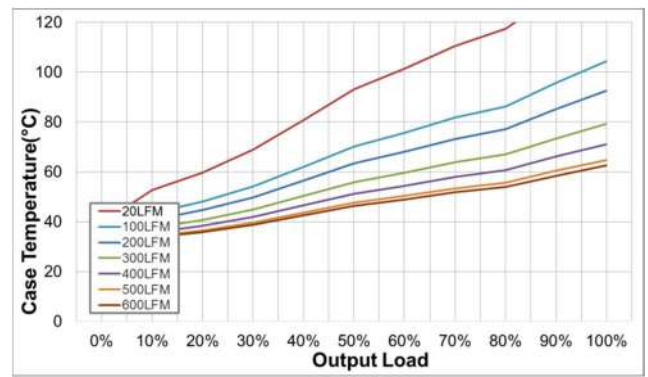


Figure 4 : Case Temperature VS. Output rated Power (Note: 20LFM = Free Air)

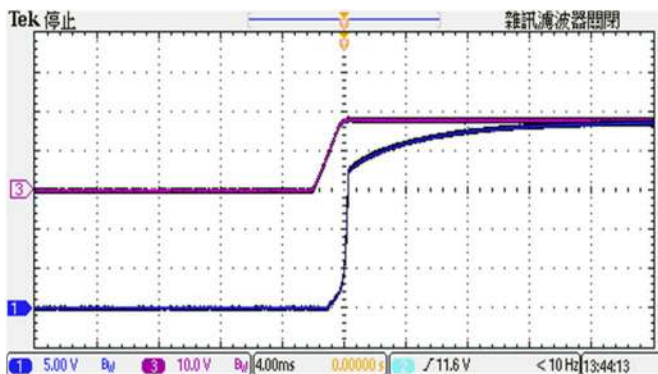


Figure 5 : CH1 = Vout, CH3 = Nominal Input
Typical Start-up waveform at Full load.

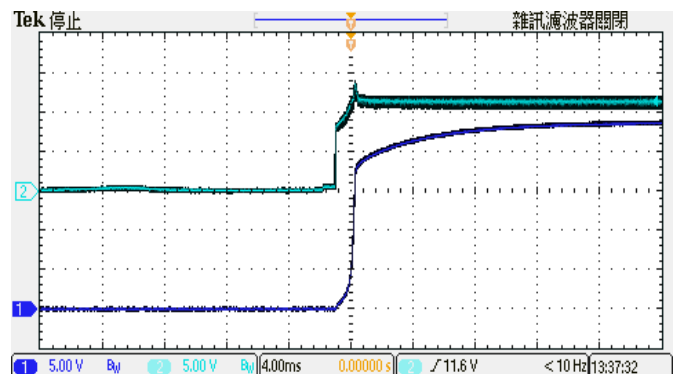


Figure 6 : CH1 = Vout, CH3 = Enable Pin
Typical Start-up waveform. Input voltage pre-applied

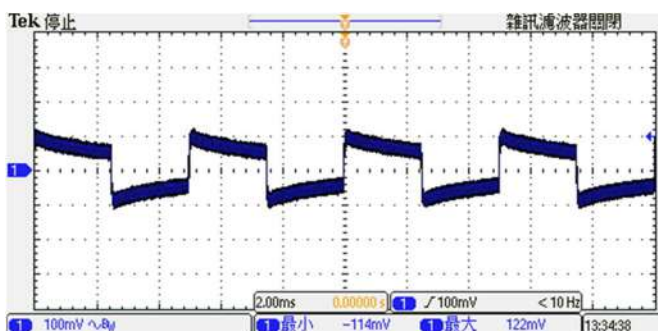


Figure 7 : Transient Response at Output step load
(V_{in} : Typical, 50~75% of output current; $\Delta I_o/\Delta t = 1\text{A}/\mu\text{s}$)

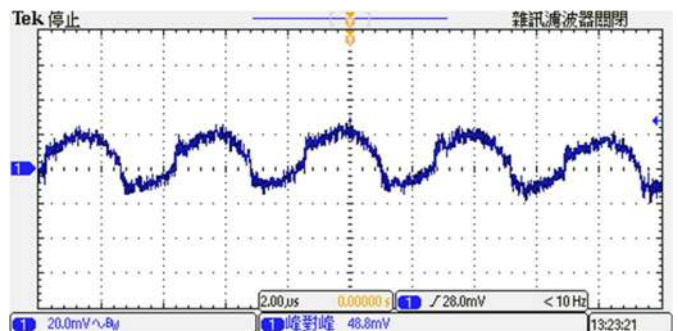


Figure 8 : Output Voltage Ripple & Noise at full load.
(V_{in} : Typical, With Output Capacitor to add 1uF MLCC)

Trimming Output Voltage – for Single output models

Only the single output converters have a trim function. That allows users to adjust the output voltage from +10% to -10%, please refer to the trim table that follow for details. Adjustments to the output voltage can be used with a simple fixed resistor as shown in Figures 1 and 2. A single fixed resistor can increase or decrease the output voltage depending on its connection.

Note:

- ✖ Trim adjustments higher than the specified range can have an adverse effect on the converter's performance and are not recommended.
- ✖ If the trim function is not used, leave the trim pin open.




Figure 1. Trim Connections To increase Output Voltages Using Fixed Resistors




Figure 2. Trim Connections To Decrease Output Voltages Using Fixed Resistors

	Trim up resistor value(KΩ)									
Vout	1%	2%	3%	4%	5%	6%	7%	8%	9%	10%
5	109	50	30	20	14	10	7	5	3.3	2
12	258	115	67	44	29	20	13	7.8	3.8	0.6
24	514	232	137	90	62	43	30	20	12	5.5
28	602	271	161	105	72	50	34	22	13	5.9
48	1039	464	273	177	120	81	54	34	18	5

	Trim down resistor value(KΩ)									
Vout	-1%	-2%	-3%	-4%	-5%	-6%	-7%	-8%	-9%	-10%
5	137	62	37	25	17	12	9	6	4	2.2
12	358	162	96	63	44	31	21	14	8.9	4.5
24	769	352	213	143	102	74	54	39	28	18
28	860	392	236	158	111	80	57	41	28	17
48	1413	638	380	251	173	121	85	57	35	18

Enable Control Function

The primary-side, Enable Control function can be specified to operate with either positive or negative polarity. Positive-polarity devices are enabled when the enable pin is left open or is pulled high.

See "Enable Function Input." Positive-polarity devices are disabled when the enable pin is pulled low (under +1.0V with respect to -input). Negative-polarity devices are off when the enable pin is high/open and on when the enable pin is pulled low. See Figure 3.

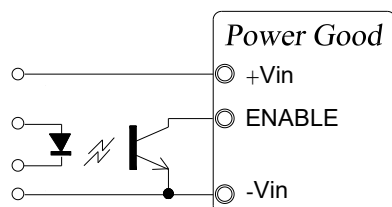


Figure 3. Driving the Enable Control pin

Output Ripple Noise

The two copper strips simulate real-world PCB impedances between the converter and its load. Scope measurements should be made using BNC connectors or the probe ground should be less than 1/2 inch and soldered directly to the fixture.

All external capacitors should have appropriate voltage ratings and be located as close to the converter as possible.

Temperature variations for all relevant parameters should be taken into consideration. The most effective combination of external I/O capacitors will be a function of line voltage and source impedance, as well as particular load and layout conditions. See Figure 4.

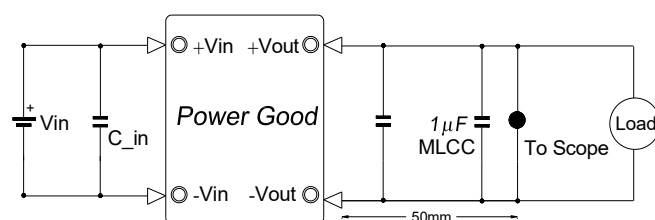


Figure 4. Measuring Output Ripple/Noise(20MHz bandwidth)

